

EXPRESSPAK®

Economical
Reliable
Versatile



ExpressPak is a member of the Ropak Family. It can handle a wide array of liquid products. With the correct tooling, it has the capability to fill anything from sauces, icings, soaps, creams, gels, water, oils, to irregular particulates and beyond.

Ropak has been a leader in the flexible packaging industry for more than two decades. We are known for manufacturing quality machinery with the latest in technology, and skilled personnel to support the equipment.



Contract Packaging • Bulk Packaging • Food Service Packaging

EXPRESSPAK®

Control and Design

The Expresspak is operator-friendly with PLC and PC control logic integrated with a touch screen control interface. These controls optimize speed, accuracy, and flexibility.

Versatility

Expresspak has a modular design that minimizes changeover time. This simplicity also reduces the cost of change parts. Complimenting this mechanical versatility with the state of the art controls allows an enormous range of pouch sizes, types of products, along with product volumes to be filled on this machine.

Standard Features

- ▶ Stainless steel construction with anodized aluminum change parts to reduce weight for ease in handling
- ▶ Powered unwinds for improved tension control
- ▶ Pneumatic unwind shaft
- ▶ Primary functions are servo driven, resulting in a high degree of accuracy, adjustability, and quiet operation.
- ▶ Pump is driven with dual ball screws for increased versatility and reliability.
- ▶ Automatic film tracking
- ▶ Washdown-friendly construction
- ▶ Timing, servo profiles, temperatures, etc. are saved to recipes
- ▶ Quick-change parts make changeover and sanitation easy.
- ▶ User friendly touchscreen interfaces with PLC
- ▶ Fault diagnostics minimizes troubleshooting time.
- ▶ Die opening is adjustable from the touchscreen to maximize speed with the given pouch size.

Options

- ▶ Coding: embossing, printing
- ▶ Hot fill capabilities
- ▶ Pressurized hopper or jacketed hopper
- ▶ Front and rear registration
- ▶ Discharge batch gate
- ▶ Specialized pouch features: perforation, pour spout, tear notch
- ▶ Individually monitored side seal dies

Specifications:


Model	Expresspak 18	Expresspak 25
Pouch Size Max	18" x 12.75"	25" x 17.75"
Pouch Size Min	1.5" x 1.5"	2" x 3"
Fill Volume Max	1 gallon	2 gallons
Fill Volume Min	5 grams	15 grams
Roll Dia. Max	22"	22"
Weight (approx.)	3900 lbs.	4200 lbs.
Dimensions	69"x71"x114"	77"x71"x104"/114"
Supply Voltage	240 / 480	240 / 480
Power Consumption	85A / 45A	85A / 45A
Air Consumption	100psi/2.5cfpm	100psi/2.5cfpm

Ropak Manufacturing Company, Inc.

1019 Cedar Lake Road, S.E. • Decatur, AL 35603 USA
Telephone: 256-350-4241 • Fax: 256-350-1611
Email: sales@ropak.com • Web: www.ropak.com



Quick-disconnect knife assembly.

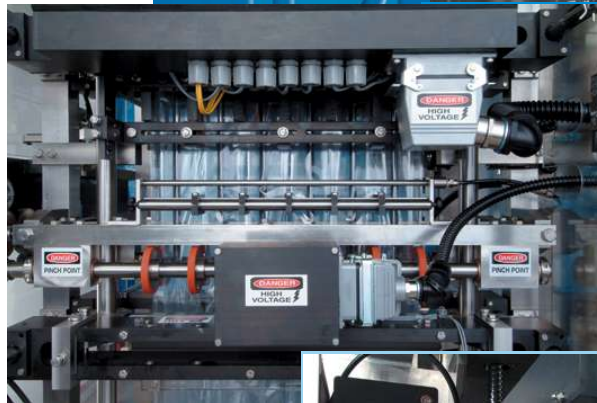

Modular construction facilitates rapid change-overs.



Fill system is sanitation-friendly with easy adjustments.



ROPAK® A LEADER IN FLEXIBLE PACKAGING TECHNOLOGY